
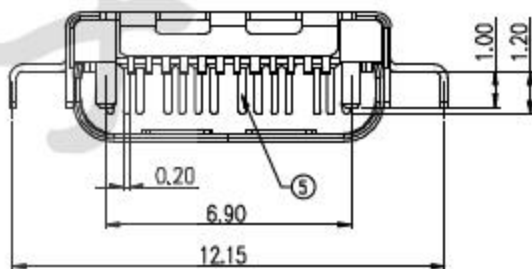


PCB LAYOUT (RECOMMENDED)

(Tol: ±0.05)

1. Electrical Performance:
 Current Rating: 5A on Vbus/ 1.25A on Vconn/0.25A on others
 Insulation Resistance: 100MΩ MIN;
 Dielectric Voltage: 100 VAC/minute;
 Contact Resistance: 40mΩ Max for initial;
2. Mechanical Performance:
 Insertion Force: 5~20N
 Extraction Force: 8~20N
 Durability: 10,000 Times

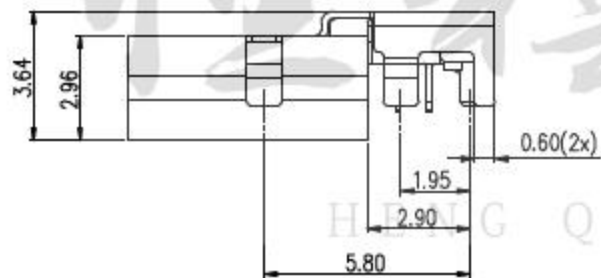

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance	东莞市恒祺电子科技有限公司	
审核:	Arvin:	X.X ±	X.X ±0.30		
校对:	Ru yi:	X.XX ±	X.XX ±0.20	名称: TYPE-C	料号:
比例:	视角关系:	X.XXX ±	X.XXX ±0.10	形号: 24PIN沉板前插后贴	
版次:	图框大小: A4	Angle ±	Angle ±5°	共 张 , 第 张	备注: