


Circuit Diagram □: Terminal No.

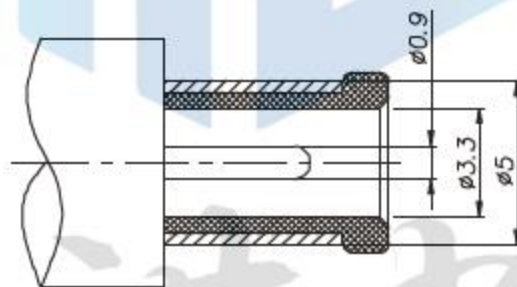

DC MATE PLUG

- Specification:
- Rating : DC 20V 4A.
  - Contact resistance: ≤30mΩ.  
After test: ≤50mΩ.
  - Insulation resistance: ≥100MΩ (500VDC).  
After test: ≥50MΩ.
  - Withstanding voltage: 500VAC.
  - Insertion and extraction force: 3N~30N.
  - life test: 5000cycles min.
  - Operation temperature range: -20℃~70℃.
  - Preservative temperature range: -40℃~85℃.
  - Sign"▲" is importance dimension.

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X ±	X.X ±0.30
校对:	Ru yi:	X.XX ±	X.XX ±0.20
比例:	视角关系:	X.XXX ±	X.XXX ±0.10
版次:	图框大小: A4	Angle ±	Angle ±5°

东莞市恒祺电子科技有限公司

名称: DC插座      型号: DC-029

料号:

共 张 , 第 张

备注: